

Introduction to Cryptography

Lecture 7

Public-Key Encryption: El-Gamal, RSA

Benny Pinkas

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 1

Public key encryption

- Alice publishes a public key PK_{Alice} .
- Alice has a secret key SK_{Alice} .
- Anyone knowing PK_{Alice} can encrypt messages using it.
- Message decryption is possible only if SK_{Alice} is known.
- Compared to symmetric encryption:
 - Easier key management: n users need n keys rather than $O(n^2)$ keys
- Compared to Diffie-Hellman key agreement:
 - No need for an interactive key agreement protocol.
- Secure as long as we can trust the association of keys with users.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 2

The El Gamal public key encryption system

- (Find the similarity with Diffie-Hellman key exchange)
- Public information (can be common to different public keys):
 - A prime $p=2q+1$, and a generator g of $H \subset Z_p^*$ of order q .
- Private key: $0 < a < q$.
- Public key: $h=g^a \text{ mod } p$.
- Encryption of message $m \in H \subset Z_p^*$
 - Pick a random $0 < r < q$.
 - The ciphertext is $(g^r, h^r \cdot m)$.

} Using public key alone
- Decryption of (s, t)
 - Compute t/s^a ($m = h^r \cdot m / (g^r)^a$)

} Using private key

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 3

El Gamal and Diffie-Hellman

- ElGamal encryption is similar to DH key exchange
 - DH key exchange: Adversary sees g^a, g^b . Cannot distinguish the ket g^{ab} from random.
 - El Gamal:
 - A fixed public key g^a .
 - Sender picks a random g^r .
 - Sender encrypts message using g^{ar} .

} Known to the adversary
} Used as a key
- El Gamal is like DH where
 - The same g^a (g^r) is used for all communication
 - There is no need to explicitly send this g^a

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 4

El Gamal encryption: security

- The adversary sees:
 - Public key: g^a . Ciphertext: $(g^r, g^{ar} \cdot m)$.
- Claim 1: Suppose that the parties share a private key K which is chosen uniformly at random from H , and that the ciphertext is $R \cdot m$. Then this is a *perfect cipher*.
- Claim 2: The DDH assumption implies that given g^a and g^r , a polynomial adversary cannot distinguish g^{ar} from a value K which is chosen uniformly at random from H .
- Corollary: given g^a and g^r , a polynomial adversary cannot distinguish $g^{ar} \cdot m$ from $K \cdot m$. Namely, cannot distinguish the result of the El Gamal encryption from a perfect encryption.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 5

The El Gamal public key encryption system

- Setting the public information
 - A large prime p , and a generator g of $H \subset Z_p^*$ of order q .
 - $|p| = 756$ or 1024 bits.
 - $p-1$ must have a large prime factor (e.g. $p=2q+1$)
 - Otherwise it is easy to solve discrete logs in Z_p^* (relevant also to DH key agreement)
 - Needed for the DDH assumption to hold (Legendre's symbol)
 - g must be a generator of a large subgroup of Z_p^* .
- Encoding the message:
 - m must be in the subgroup generated by g .
 - Alternatively, encrypt m using $(g^r, H(h^r) \oplus m)$. *Decryption is done by computing $H((g^r)^a)$.* (H is a hash function that preserves the pseudo-randomness of h^r .)

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 6

The El Gamal public key encryption system

- Overhead:
 - Encryption: two exponentiations; preprocessing possible.
 - Decryption: one exponentiation.
 - message expansion: $m \in Z_p^* \Rightarrow (g^r, h^r \cdot m)$.
- Randomized encryption
 - Must use fresh randomness r for every message.
 - Provides semantic security: two different encryptions of the same message are different.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 7

Semantic security

- Suppose that a public key encryption procedure was deterministic.
 - Then if Eve suspects that Bob might encrypt either 1 or 2, she can compute (by herself) $E(1)$ and $E(2)$ and compare them to the encryption that Bob sends.
- Semantic Security: knowing that an encryption is either $E(1)$ or $E(2)$, Eve cannot decide with probability better than $\frac{1}{2}$ which is the case.
- El Gamal encryption provides semantic security:
 - Each encryption uses fresh randomness. Therefore Eve cannot use a table of encryptions of known values.
 - Cannot distinguish $(g^r, h^r \cdot 1)$ from $(g^r, h^r \cdot 2)$.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 8

Homomorphic property

- Insecurity against chosen ciphertext attacks:
 - Attacker wants to decrypt $(s, t) = (g^r, h^r \cdot m)$.
 - Chooses random r' , computes $(s', t') = (s, t \cdot r') = (g^r, h^r \cdot (m \cdot r'))$.
 - Asks for a decryption of (s', t') . Receives $m \cdot r'$.
- Homomorphic property:
 - Given encryptions of x, y , it's easy to generate an encryption of $x \cdot y$.
 - $(g^r, h^r \cdot x) \times (g^{r'}, h^{r'} \cdot y) \rightarrow (g^{r+r'}, h^{r+r'} \cdot x \cdot y)$

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 9

Homomorphic encryption


- Homomorphic encryption is useful for performing operations over encrypted data.
- Given $E(m_1)$ and $E(m_2)$ it is easy to compute $E(m_1 m_2)$.
- For example, an election procedure:
 - A “Yes” is $E(2)$. A “No” vote is $E(1)$.
 - Take all the votes and multiply them. Obtain $E(2^j)$, where j is the number of “Yes” votes.
 - Decrypt the result and find out how many “Yes” votes there are, without identifying how each person voted.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 10

Integer Multiplication & Factoring as a One Way Function.

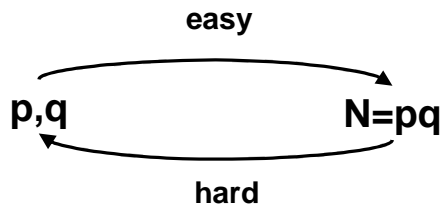

Can a public key system be based on this observation ?????

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 11

Excerpts from RSA paper (CACM, 1978)

The era of “electronic mail” may soon be upon us; we must ensure that two important properties of the current “paper mail” system are preserved: (a) messages are *private*, and (b) messages can be *signed*. We demonstrate in this paper how to build these capabilities into an electronic mail system.

At the heart of our proposal is a new encryption method. This method provides an implementation of a “public-key cryptosystem,” an elegant concept invented by Diffie and Hellman. Their article motivated our research, since they presented the concept but not any practical implementation of such system.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 12

The Multiplicative Group Z_{pq}^*

- p and q denote two large primes (e.g. 512 bits long).
- Denote their product as $N = pq$.
- The multiplicative group $Z_N^* = Z_{pq}^*$ contains all integers in the range $[1, pq-1]$ that are relatively prime to both p and q .
- The size of the group is
 - $\phi(n) = \phi(pq) = (p-1)(q-1) = N - (p+q) + 1$
- For every $x \in Z_N^*$, $x^{\phi(N)} = x^{(p-1)(q-1)} = 1 \pmod{N}$.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 13

Exponentiation in Z_N^*

- Motivation: use exponentiation for encryption.
- Let e be an integer, $1 < e < \phi(N) = (p-1)(q-1)$.
 - Question: When is exponentiation to the e^{th} power, ($x \mapsto x^e$), a one-to-one operation in Z_N^* ?
- Claim: If e is relatively prime to $(p-1)(q-1)$ then $x \mapsto x^e$ is a one-to-one operation in Z_N^* .
- Constructive proof:
 - Since $\gcd(e, (p-1)(q-1)) = 1$, e has a multiplicative inverse modulo $(p-1)(q-1)$.
 - Denote it by d , then $ed = 1 + c(p-1)(q-1) = 1 + c\phi(N)$.
 - Let $y = x^e$, then $y^d = (x^e)^d = x^{1+c\phi(N)} = x$.
 - I.e., $y \mapsto y^d$ is the inverse of $x \mapsto x^e$.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 14

The RSA Public Key Cryptosystem

- Public key:
 - $N=pq$ the product of two primes (we assume that factoring N is hard)
 - e such that $\gcd(e, \phi(N)) = 1$ (are these hard to find?)
- Private key:
 - d such that $de \equiv 1 \pmod{\phi(N)}$
- Encryption of $M \in Z_N^*$
 - $C = E(M) = M^e \pmod{N}$
- Decryption of $C \in Z_N^*$
 - $M = D(C) = C^d \pmod{N}$ (why does it work?)

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 15

Constructing an instance of the RSA PKC

- Alice
 - picks at random two large primes, p and q .
 - picks uniformly at random a large d that is relatively prime to $(p-1)(q-1)$ ($\gcd(d, \phi(N)) = 1$).
 - Alice computes e such that $de \equiv 1 \pmod{\phi(N)}$
- Let $N=pq$ be the product of p and q .
- Alice publishes the public key (N, e) .
- Alice keeps the private key d , as well as the primes p , q and the number $\phi(N)$, in a safe place.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 16

Properties of RSA

- Deterministic encryption. In textbook RSA:
 - M is always encrypted as M^e
 - The ciphertext is as long as the domain of M
- The public exponent e may be small. It's common to choose its value to be either 3 or $2^{16}+1$. The private key d must be long.
 - Each encryption involves only a few modular multiplications. Decryption requires a full exponentiation.
- Chosen ciphertext attack: (homomorphic property)
 - RSA is susceptible to chosen ciphertext attacks: Given a ciphertext $C=M^e$, choose a random R and generate $C'=CR^e$ (an encryption of $M \cdot R$). Decrypting C' reveals M .

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 17

Decryption overhead

- Usage of a small $e \Rightarrow$ Encryption is more efficient than a full blown exponentiation.
- Decryption requires a full exponentiation ($M=C^d \bmod N$)
- Can this be improved?

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 18

The Chinese Remainder Theorem (CRT)

- Thm:
 - Let $N=pq$ with $\gcd(p,q)=1$.
 - Then for every pair $(y,z) \in \mathbb{Z}_p \times \mathbb{Z}_q$ there exists a *unique* $x \in \mathbb{Z}_N$, s.t.
 - $x=y \bmod p$
 - $x=z \bmod q$
- Proof:
 - The extended Euclidian algorithm finds a,b s.t. $ap+bq=1$.
 - Define $c=bq$. $c=1 \bmod p$. $c=0 \bmod q$.
 - Define $d=ap$. $d=0 \bmod p$. $d=1 \bmod q$.
 - Let $x=cy+dz \bmod N$.
 - $cy+dz = 1y + 0 = y \bmod p$.
 - $cy+dz = 0 + 1z = z \bmod q$.
 - (How efficient is this?)
 - (The inverse operation, finding (y,z) from x , is easy.)

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 19

More efficient RSA decryption

- CRT:
 - Given p,q compute a,b s.t. $ap+bq=1$.
 - $c=bq$; $d=ap$
- } Once for all messages
- Decryption, given C :
 - Compute $y'=C^d \bmod p$. (instead of d can use $d'=d \bmod p-1$)
 - Compute $z'=C^d \bmod q$. (instead of d can use $d''=d \bmod q-1$)
 - Compute $M=cy'+dz' \bmod N$.
 - Overhead:
 - Two exponentiations modulo p,q , instead of one exponentiation modulo N .
 - Overhead of exponentiation is cubic in length of modulus.
 - i.e., save a factor of $2^{3/2}$.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 20

Security reductions

- Security by reduction
 - Define what it means for the system to be “secure” (chosen plaintext/ciphertext attacks, etc.)
 - State a “hardness assumption” (e.g., that it is hard to extract discrete logarithms in a certain group).
 - Show that if the hardness assumption holds then the cryptosystem is secure.
- Benefits:
 - To examine the security of the system it is sufficient to check whether the assumption holds
 - Similarly, for setting parameters (e.g. group size).

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 21

RSA Security

- If factoring N is easy then RSA is insecure
 - (factor $N \Rightarrow$ find $p, q \Rightarrow$ find $(p-1)(q-1) \Rightarrow$ find d from e)
- Factoring assumption:
 - For a randomly chosen p, q of appropriate length, it is infeasible to factor $N=pq$.
- This assumption might be too weak (might not ensure secure encryption)
 - Maybe it's possible to break RSA without factoring N ?
 - We don't know how to reduce RSA security to the hardness of factoring.
- Fact: finding d is equivalent to factoring.
 - I.e., if it is possible to find d given (N, e) , then it is easy to factor N .
- “hardness of finding d assumption” no stronger than hardness of factoring.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 22

The RSA assumption: Trap-Door One-Way Function (OWF)


- (what is the minimal assumption required to show that RSA encryption is secure?)
- (Informal) definition: $f : D \rightarrow R$ is a *trapdoor one way function* if there is a trap-door s such that:
 - Without knowledge of s , the function f is a one way. I.e., for a randomly chosen x , it is hard to invert $f(x)$.
 - Given s , inverting f is easy
- Example: $f_{g,p}(x) = g^x \bmod p$ is *not* a trapdoor one way function.
- Example: assuming that RSA is a trapdoor OWF
 - $f_{N,e}(x) = x^e \bmod N$. (assumption: for a random N, e, x , inverting is hard.)
 - The trapdoor is d s.t. $ed = 1 \bmod \phi(N)$
 - $[f_{N,e}(x)]^d = x \bmod N$

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 23

RSA as a One Way Trapdoor Permutation

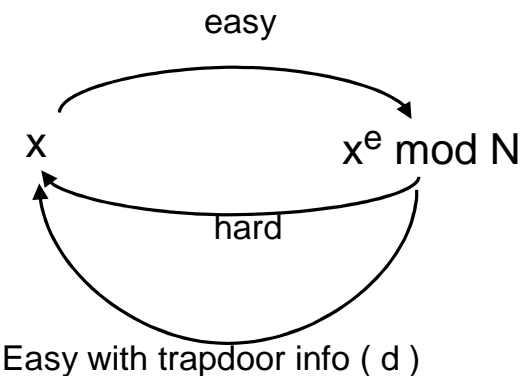

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 24

RSA assumption: cautions

- The RSA assumption is quite well established:
 - RSA is a Trapdoor One-Way Permutation
 - Hard to invert on random input – without secret key
- But is it a secure cryptosystem?
 - Given the assumption it is hard to reconstruct the input, but is it hard to learn *anything* about the input?
- Theorem [G]: RSA hides the $\log(\log(n))$ least *and* most significant bits of a uniformly-distributed random input
 - But some (other) information about pre-image may leak
 - And... adversary can detect a repeating message

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 25

Is it safe to use a common modulus ?

- Consider the following environment:
 - There is a global modulus N . No one knows its factoring.
 - Each party has a pair (e_i, d_i) , such that $e_i d_i = 1 \bmod N$.
 - Used as a public/private key pair.
- The system is insecure.
- Party 1, knowing (e_1, d_1)
 - can factor N
 - Find d_i for any other party i .

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 26

RSA with a small exponent

- Setting $e=3$ enables efficient encryption
- Might be insecure if not used properly
 - Assume three users with public keys N_1, N_2, N_3 .
 - Alice encrypts the same message to all of them
 - $C_1 = m^3 \bmod N_1$
 - $C_2 = m^3 \bmod N_2$
 - $C_3 = m^3 \bmod N_3$
- Can an adversary which sees C_1, C_2, C_3 find m ?
 - $m^3 < N_1 N_2 N_3$
 - N_1, N_2 and N_3 are most likely relatively prime (otherwise can factor).
 - Chinese remainder theorem \rightarrow can find $m^3 \bmod N$ (and therefore m^3 over the integers)
 - Easy to extract 3rd root over the integers.

December 11, 2005

Introduction to Cryptography, Benny Pinkas

page 27